



with NEOLOY® Design-life Polymeric Alloy

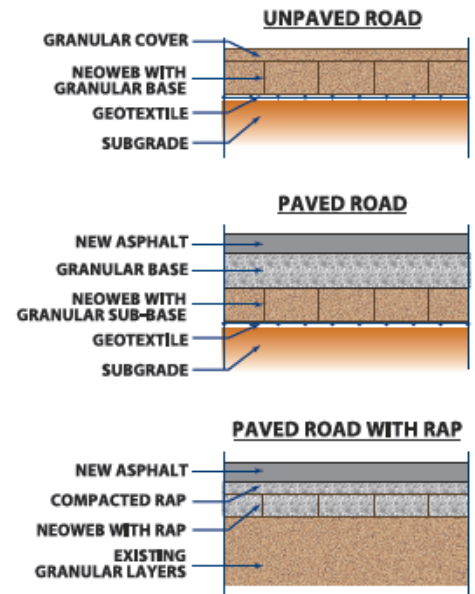

LOAD SUPPORT – ROAD PAVEMENTS

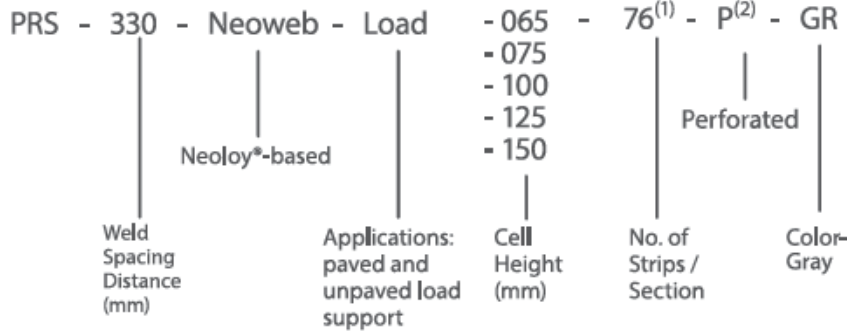

- (1) Customization – different no. of strips (and heights) available upon special order; customized widths for large scale projects may be ordered according to the width of the road.
- (2) Standard Perforations – holes up to 6-10% of cell wall area of variable dimensions and shapes; Surface Texture – slightly coarse indentations over the entire area of the strip.

CELL & SECTION NOMINAL DIMENSIONS

CELL PROPERTIES	DESCRIPTION	SECTION PROPERTIES	DESCRIPTION
Cell Distance between Weld Seams	330 mm (±2.5%)	No. of Cells/m ²	40
Cell Wall Heights	65, 75, 100, 125, 150 mm	Section Size (Expanded)	2.50 x 8.00 m (±3%)
Cell Dimension (Expanded)	250 x 210 mm (±3%)	Section Area (Expanded)	20 m ²

SHIPPING DATA⁽³⁾ (for standard size section only with 76 strips per section)

Product	Section Weight (kg)	Pallet Gross Weight (kg) (pallet ~13 kg)	Sections per Pallet	Area per Pallet (m ²)	Quantity - m ² per 20' Container (5) (max. 20 pallets)	Quantity - m ² per 40' Container (5) (max. 44 pallets)
PRS-330-065-76P	16.4	503	30	600	12,000	26,400
PRS-330-075-76P	18.0	480/ 516	26/28	520/560	11,200	24,560
PRS-330-100-76P	23.6	484	20	400	8000	17,600
PRS-330-125-76P	29.7	488	16	320	6400	14,080
PRS-330-150-76P	35.9	444/516	12/14	240/280	5600	12,440

- (3) All data are given as indication only and not binding on PRS. Pallet data varies due to container stacking limitations. 3) Typical pallet dimensions are ~106 x 108 cm (l x w) x 108-115 cm (ht)
- (4) Additional sections are packed in bulk (not palletized) inside containers in order to maximize shipping capacity
- * Note - Does not include Bostitch P50-10B Stapling Plier and Bostitch SB103020-1/2- 2M Galvanized Staples, 1/2 "(13 mm) 2100/box

CERTIFICATIONS and ACCREDITATIONS

DESCRIPTION	ISSUED BY	CERTIFICATE NUMBER
Quality Management System Certification - ISO9001:2008	IQC Group (RvA)	12763
CE Marking per EU Directive 89/106/EEC	ITB, Building Research Institute, EU	1488-CPD-0099
Accreditation of New Materials and Techniques	Indian Roads Congress	IRC-24(12)2009(ACC-30)
GOST R – Mark of Conformity - Russian Standards Institute	Federal Agency for Technical Regulation, Russia	POCC IL AE83.H07573
Certificate of 3D Cellular Confinement System Compliance	Gazpromsert Certification Dept., Gazprom, Russia	FO00.IL.1101.H00019

DISTRIBUTED IN SOUTH AFRICA BY



JHB: Tel +27 11 922 3300
 CT: Tel +27 21 531 8110
 KZN: Tel +27 31 717 2300
 EL: Tel +27 43 727 1055
 PE: Tel +27 41 453 0755
 WEB: www.kaytech.co.za

Fax +27 11 392 1112
 Fax +27 21 531 5498
 Fax +27 31 702 0435
 Fax +27 43 727 1065

Specifications - NEOWEB® with NEOLOY®



LOAD SUPPORT – ROAD PAVEMENTS



SYSTEM PHYSICAL PROPERTIES

PROPERTIES	DESCRIPTION
Material	Neoloy® polymeric nano-composite alloy (based on dimensionally stable polymer nano-fibers (polyester or nylon) in a polyolefin matrix)
Friction Angle Efficiency	Angle of internal friction efficiency factor >0.80
Traceability	Each section marked for full detailed traceability

MECHANICAL PROPERTIES - STIFFNESS AND STRENGTH

	DESCRIPTION	UNITS	TEST METHOD
SHORT TERM • Strength at Yield	> 21.5	kN/m	PRS method (1)
LONG TERM RESISTANCE TO PLASTIC (Permanent) DEFORMATIONS (Creep Included) • Allowed Strength for Design (50 years) • Creep (Deformation) Reductoin Factor (50 years)	> 8.0 < 2.7	kN/m	ASTM D-6992 (SIM) (2) ASTM D-6992 (SIM) (3)

(1) Test sample cut from cell seam to seam measured at strain rate 20%/min, 23°C;

(2) Allowed strength to reach 10% creep strain max for 50 years at 23°C;

(3) Creep (deformation) reduction factor for 50 years at 23°C

DIMENSIONAL STABILITY

PROPERTIES	DESCRIPTION	UNITS	TEST METHOD
Coefficient of Thermal Expansion (CTE)	< 80	ppm/°C	ISO 11359-2 (TMA) ASTM E831 (4)

(4) CTE measurement range from -30°C to +30°C

PERFORMANCE AT ELEVATED TEMPERATURES

PROPERTIES	DESCRIPTION	UNITS	TEST METHOD
Flexural Storage Modulus at sample temp: • 30°C • 45°C • 60°C • 75°C	> 750 > 650 > 550 > 300	MPa	ISO 6721-1 ASTM E2254 (DMA)

OXIDATION RESISTANCE

PROPERTIES	DESCRIPTION	UNITS	TEST METHOD
Oxidative induction Time (OIT) (virgin material prior to any aging)	> 100	minutes	ISO 11357-6, ASTM D3895 (OIT @ 200°C)

PHOTOCHEMICAL RESISTANCE

PROPERTIES	DESCRIPTION	UNITS	TEST METHOD
Durability to UV Degradation (UV Resistance)	> 250	minutes	ASTM D5885 (HPOIT @ 200°C)